



4½ in 15.1 lb/ft

Clearance: Standard

| Label | Pin/Box | OD [mm] | ID [mm] | Min. Turning Length [mm] | Min. Boring Length [mm] | OD [in] | ID [in] | Min. Turning Length [in] | Min. Boring Length [in] |
|------------------|---------|---------------|--------------|--------------------------|-------------------------|---------------|---------------|--------------------------|-------------------------|
| 4½ in 15.1 lb/ft | Box | 189.00 ± 0.50 | 96.98 ± 0.30 | 94.50 | 94.50 | 7.441 ± 0.020 | 3.818 ± 0.012 | 3.720 | 3.720 |
| | Pin | 114.59 ± 0.85 | 97.60 ± 0.30 | 100.68 | 100.68 | 4.511 ± 0.033 | 3.843 ± 0.012 | 3.964 | 3.964 |

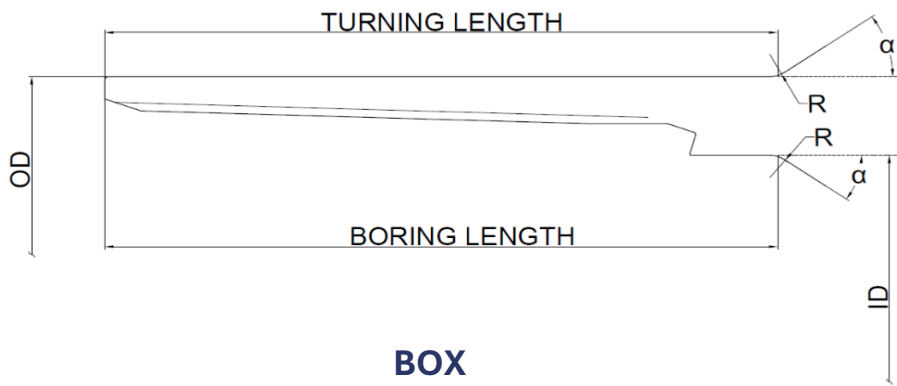

BOX

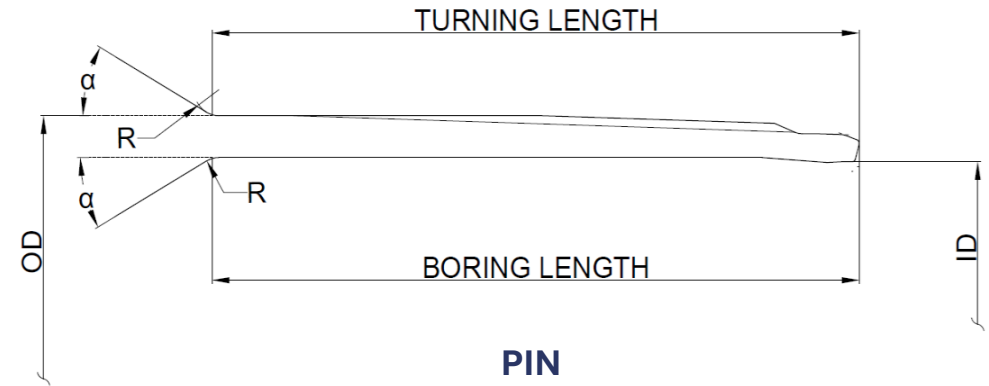

PIN

$R_{\min} = 20 \text{ mm} = 0.79 \text{ in}$

$\alpha_{\min} = 30^\circ$



www.sentinelconnections.com

PCBD-SENTINEL_One-4.5-15.1

Date of issue (dd/mm/yyyy): 31/10/2024