



5 in 21.4 lb/ft

Clearance: Standard

Label	Pin/Box	OD [mm]	ID [mm]	Min. Turning Length [mm]	Min. Boring Length [mm]	OD [in]	ID [in]	Min. Turning Length [in]	Min. Boring Length [in]
5 in 21.4 lb/ft	Box	264.00 ± 0.50	103.25 ± 0.30	132.00	132.00	10.394 ± 0.020	4.065 ± 0.012	5.197	5.197
	Pin	127.32 ± 0.95	103.90 ± 0.30	127.74	127.74	5.013 ± 0.037	4.091 ± 0.012	5.029	5.029

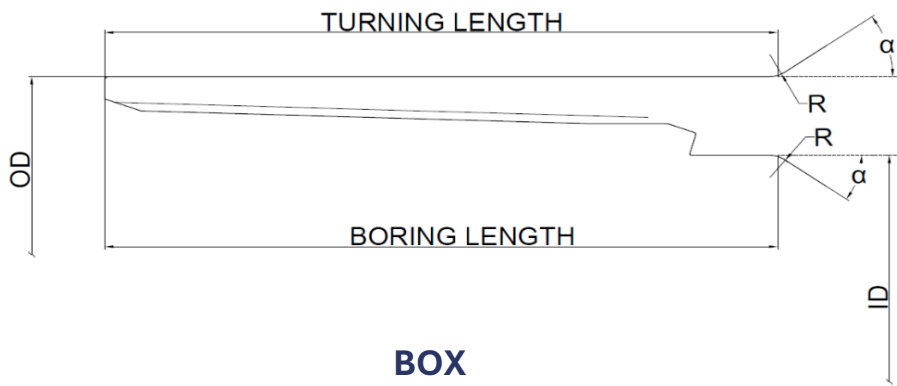

BOX

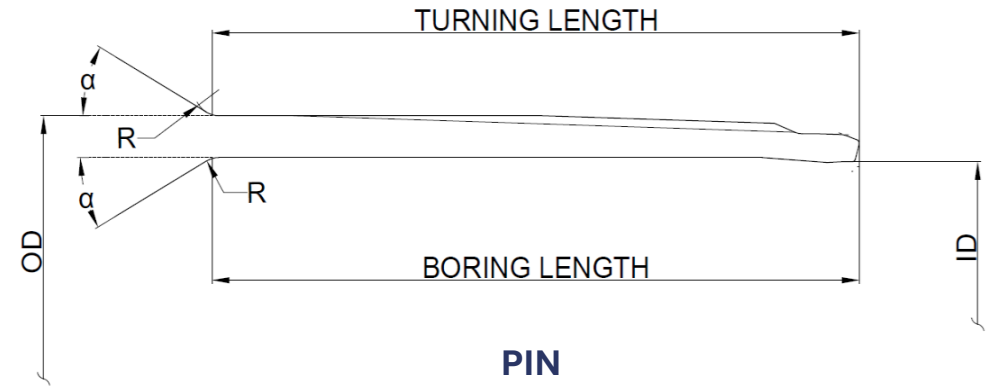

PIN

$$R_{\min} = 20 \text{ mm} = 0.79 \text{ in}$$

$$\alpha_{\min} = 30^\circ$$



www.sentinelconnections.com

PCBD-SENTINEL_One-5-21.4

Date of issue (dd/mm/yyyy): 31/10/2024

TUBACEX
GROUP