



## 5 in 23.3 lb/ft

Clearance: Standard

Label	Pin/Box	OD [mm]	ID [mm]	Min. Turning Length [mm]	Min. Boring Length [mm]	OD [in]	ID [in]	Min. Turning Length [in]	Min. Boring Length [in]
5 in 23.3 lb/ft	Box	264.00 ± 0.50	101.15 ± 0.30	132.00	132.00	10.394 ± 0.020	3.982 ± 0.012	5.197	5.197
	Pin	127.32 ± 0.95	99.54 ± 0.30	127.74	127.74	5.013 ± 0.037	3.919 ± 0.012	5.029	5.029

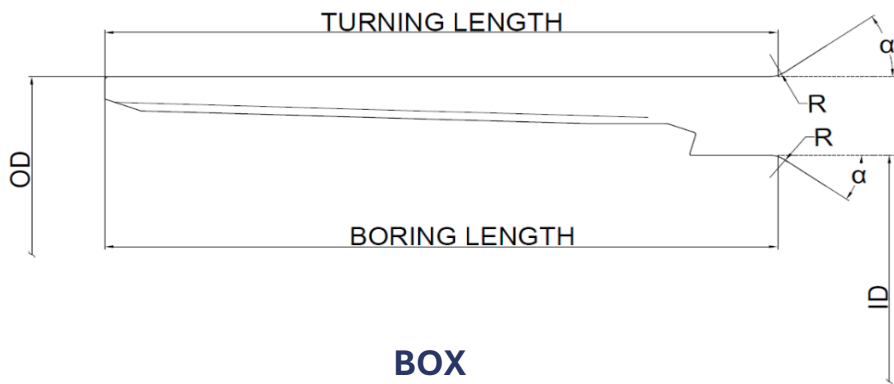

**BOX**

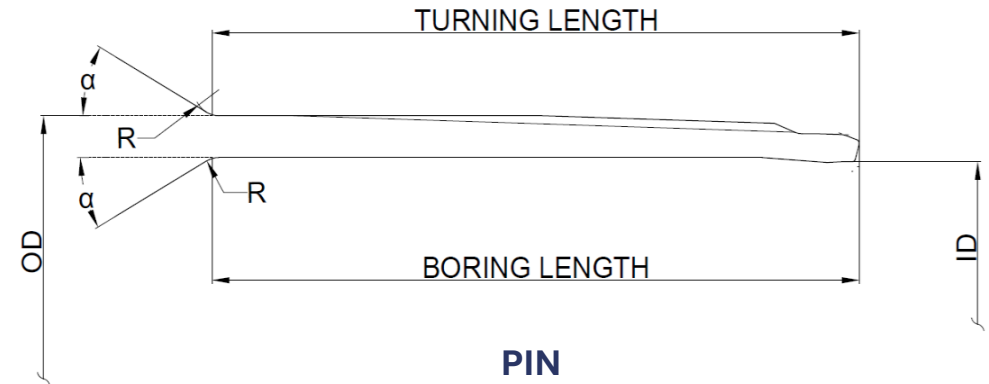

**PIN**

$R_{\min} = 20 \text{ mm} = 0.79 \text{ in}$

$\alpha_{\min} = 30^\circ$



[www.sentinelconnections.com](http://www.sentinelconnections.com)

PCBD-SENTINEL\_One-5-23.3

Date of issue (dd/mm/yyyy): 31/10/2024

**TUBACEX**  
GROUP